

SPECIFICATION

HS CODE	8419.89. 9000
PRODUCT	30kg INDUSTRIAL ROASTER
MODEL No.	THCR-25

1. PRODUCT

30kg shop roaster

2. PURPOSE

For Espresso blend, In-shop production, Small-quantity production, etc.

3. COMPONENTS

BODY + CYCLONE + COOLING TRAY
(OPTION) AFTERBURNER, VACUUM DESTONER

4. TYPE

GAS (LPG / NATURAL GAS)

5. COLOUR

MATT BLACK

6. FEATURES

EASY TO OBSERVE ROASTING PROCESS
QUICK BEAN RELEASE
CLEAN SILVER SKIN COLLECT
STABLE RADIANT HEAT TRANSFER AND HOT AIR
PRECISE AIR AND HEAT CONTROL
POWERFUL COOLING
HIGH HEAT CONDUCTIVITY BY A GREAT HOT BLAST






7. SPEC

DIMENSION (W) x (L) x (H) mm	2450 x 1800 x 2900 mm / Weight 1,000kg	
EXHAUST DIAMETER	Exhaust 250mm / Cooling 150mm	
POWER	3 PHASE 220V, 380V 60Hz	
	Motor : AC 220V 750W 1/20 60Hz	
	Blower : Cooling AC 2.25Kw/60Hz Exhaust: AC 750W/60Hz	
WORK CAPACITY	MAX 30kg / batch	
WORKING TIME	8~20 MINS	
POWER CONSUMPTION	6.0 kw/hr (Including Afterburner)	
GAS PRESSURE	LPG 2.75Kpa	LNG 1.96 kpa/
GAS CONSUMPTION	LPG 4.9 kg/h	LNG 57,000kcal/h

8. SIZE

THCR-25

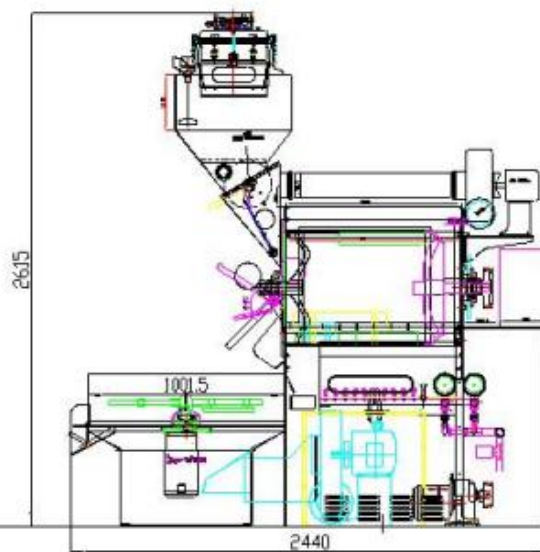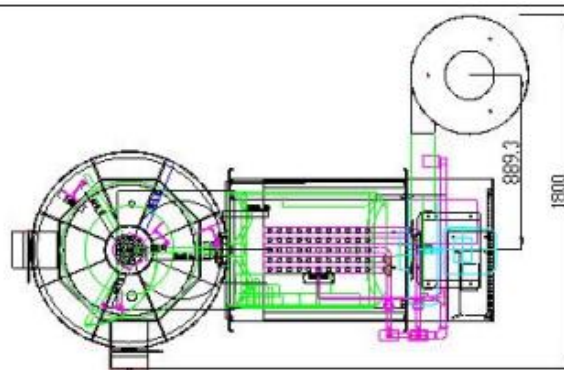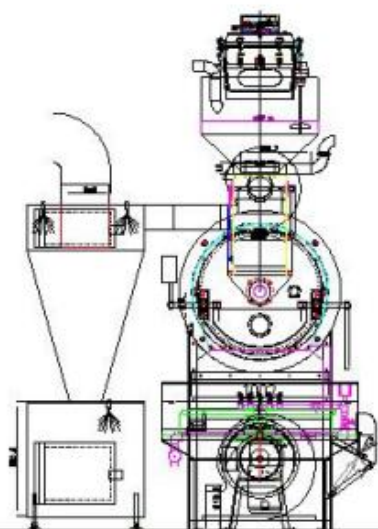

SPECIFICATION

PRODUCT	30kg Vacuum Conveyor
MODEL No.	THV-400

1. PRODUCT

Vacuum Conveyor

2. PURPOSE

To transfer ideal amounts of green beans to the hopper on top of the roaster

3. COMPONENTS

Body + Hose + Green beans Hopper

4. TYPE

Motor type

5. MATERIAL

Stainless painting

6. FEATURES

To easily and quickly transport large amounts of beans from the store or from the supply hopper to the feeding hopper.



Capacity	25-30KG
Demension	Φ 400
Power consumption	220V (60Hz)
	2400W
Power source	Vacuum motor 3.2HP
Material	①Body : Stainless painting

SPECIFICATION

PRODUCT	Vacuum Destoner
MODEL No.	THSV-25

1. PRODUCT

30kg Vacuum Conveyor

2. PURPOSE

To adjust vacuum amount in order to remove dirt and dust

3. COMPONENTS

Body

4. TYPE

Vacuum Motor

5. MATERIAL

Stainless Steel

6. FEATURES

Remove dirt and dust from the beans by controlling the degree of vacuum



Capacity	MAX 150kg/h
Dimension	2,450(w)×1,020(L)×2,190(H)(mm)
Volume	250liter
Power	1Phase 380V (60Hz)
	power consumption 1.5kw/h
Power source	Vacuum blower 2hp
Material	①Body: sus 304 polishing 1.5t ②Drum : sus 304 Pipe 50 x 1.5t

SPECIFICATION

PRODUCT	AFTER BURNER
MODEL No.	THAB-25

1. PRODUCT

30kg After Burner

2. PURPOSE

To remove the smoke from the roaster.

3. COMPONENTS

Body+ Burner +Control Box

4. TYPE

Gas burner

5. MATERIAL

Stainless Steel

6. FEATURES

- It is the afterburner of Industrial coffee roaster THCR-25, which burns off the fumes generated in the process of roasting coffee by roaster
- Use low-pressure for home appliance
- Timer function
- A sensor displaying a temperature mounted on the pipe
- Safety device for extinguishing a fire
- Safety device against power failure



Model	THAB-25 (Boby+ Stand)	
Workable Temperature	300~760°C	
Inner Temperature	1,100°C	
Dimension	Furnace: φ770 Input: φ200 Discharge: φ250	Table : 1220x632x2725 (incl. Body) It can be depending on the installation of the environment.
Power	1Phase, 220V (60Hz)	
Gas consumption	100,000kcal/h	
Gas pressure	LPG: 2.8 (+0.5 -0.5) LNG: 2.0 (+0.5 -1.0)	
Material	Body;; Stainless steel	
Heat source	Gas burner	

9. PREPARATION: EXHAUST HOLE, GAS AND POWER SUPPLY, ELECTRONIC EXTENSION(if needed), Afterburner(if needed)

10. WARRANTY

ONE FULL YEAR FROM THE PURCHASE DATE

TWO YEARS PARTS WARRANTY IN CASE OF DIRECT PURCHASE FROM KOREA

WARRANTY IS NOT VALID IN CASE OF FOLLOWINGS.

1) SECOND-HAND MACHINE 2) NO SERIAL NO. 3) PROBLEMS FROM NOT FOLLOWING MANUAL GUIDELINE.
4) TROUBLES FROM WRONG GAS TYPE OR POWER, POOR PIPE LINE WORK, HUMIDITY, NO EARTH 5) NATURAL DISASTER / 6) POOR MAINTENANCE-CLEANING / 7) DIFFERENT USAGE / 8) INTENDED MISTAKE, MODIFICATION, SHOCK, DAMAGE, MAINTENANCE FROM NOT AUTHORIZED PERSON 9) NO OSERVATION DURING ROASTING. 10) USAGE OF NON GENUINE PARTS, CLEANING WITH WATER 10) FROM NOT FOLLOWING GENERAL SAFETY REGULATIONS 11) FROM EXTERNAL SURROUNDINGS 12) REWORK 13) CONSUMABLES



T. (032) 624 3410~3

F. (032) 624 3414

E. taehwan.mj@gmail.com